

## INDUSTRIAL S/F RUB SPORT COURT COATING

### DESCRIPTION:

**INDUSTRIAL S/F RUB SPORT COURT COATING** is a single-packed synthetic rubber solvent-based coating.

### SPECIAL FEATURES:

- Fast dry
- Hardwearing
- Non slippery
- Excellent adhesion & impact resistance
- Easy to clean

### USE:

Industrial Sport Court Coating is intended for indoor/outdoor concrete floor, basketball, lawn tennis, badminton, gymnasium and similar.

### COLOR:

Green and other color available upon request.


### FINISH:

Semi-Flat and Flat

### APPLICATION:



Brush



Roller

### REDUCTION:

Sport Court Reducer  
10% max based on volume

### DRYING TIME:

Dry hard: 4 hours

### THEORETICAL COVERAGE:

25-30 sq. m. / gal @ 40µm DFT


### SURFACE PREPARATION:

Adhesion barriers like dust, dirt, oil must be removed. Dry Surface thoroughly prior to painting.

**For smooth surfaces**, seal the surface using Epoxy FC 1805FC Sealer and let dry overnight. Sand with grit paper (#240 or #400) then apply Epoxy Primer and let dry overnight. Sand with grit paper (#400) then apply 2 coats of Industrial Sport Court Coating paint.

**For dented surfaces**, apply Epoxy Marine Putty after the sealer and let dry overnight. Sand with grit paper (#240) on applied Marine Putty and re-coat with Epoxy FC 1805FC Sealer and let dry overnight. Sand with grit paper (#240 or #400) then apply Epoxy Primer and let dry overnight. Sand with grit paper (#400) then apply 2 coats of Industrial Sport Court Coating paint.

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

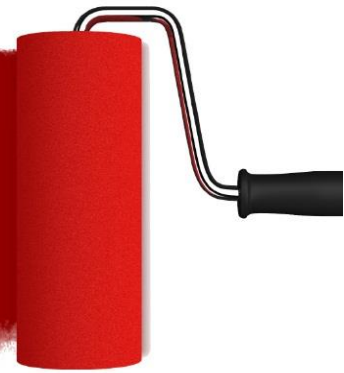**PACKAGING:**

4L lithographed round can

**SHELF LIFE:**

1 year in unopened container

**STORAGE & DISPOSAL:**

Keep container tightly sealed. Do not store above 35 °C. Must not be disposed together with household garbage. Do not allow product to reach sewage system. Disposal must be according to government regulations.

**LABEL ELEMENTS:**

**Danger:** Flammable liquid and vapour. May cause genetic defects. May cause cancer. Toxic to aquatic life with long lasting effects. Harmful if inhaled. Causes skin irritation. May be harmful in contact with skin.

**Contains:** Solvent Naphtha (Petroleum), Light Arom, Dimethylbenzene

**Precaution:** Avoid exposure-obtain special instructions before use. Keep locked up and out of the reach of children. Do not empty into drains, dispose of this material and its container at hazardous or special waste collection point. Wear suitable protective clothing, gloves, and eye/face protection. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

**Head Office Address:**

No. 2, 3rd Avenue,  
S.Osmeña Blvd., North  
Reclamation Area, Cebu City,  
6000, Philippines  
[www.islandpaints.com](http://www.islandpaints.com)

**Email:**

[info@treasureisland.com.ph](mailto:info@treasureisland.com.ph)

**Tel # Head Office :**

232-0513 to 17

**Fax:**

(63-32) 232-0518

**Information Office:**

83-35 Plaridel St.,  
Cebu City, 6000,  
Philippines

**Tel # for Info Office :**

254-2226

412-4113

412-4082

**Fax:**

(63-32) 255-2656