

ISLAND ACRYLIC TINTING COLORS

DESCRIPTION:

ISLAND ACRYLIC TINTING COLOR is a mixture of quality tested thermoplastic acrylic resin and colored pigments for maximum durability and protection. It has inherent hardness, excellent inter coat adhesion, resistant to gasoline, acid, and common chemicals. It also dries rapidly with lasting full gloss.

USE:

For automotive refinishing and other transport vehicles, appliances, and other industrial application where fine finish is desired.

COLOR:

IACTC 2610 Lemon Yellow
IACTC 2690 Metallic Fine

APPLICATION:



Spray

Island Acrylic Tinting Color can be used both as tinting colors and finish colors.

REDUCTION:

Island 202 Acrylic Thinner
Mix one (1) part Island Acrylic Paint to approximately two (2) parts Island Acrylic Thinner.

DRYING TIME:

Dry to recoat : 1-2 hours depending on weather condition
Dry to rub/buff : about two (2) days

COVERAGE:

15 sq. m. per liter @ 25 microns dry film

SURFACE PREPARATION:

- Normal de-rusting, de-greasing / sanding preparation for metal surfaces.
- Primer – Epoxy Zinc Chromate Yellow, Red Oxide or Gray depending on type of metal.
- Tie Coat -Pure Acrylic Primer Surfacer Gray
- Finish Coat – Color Coat

PACKAGING:

1L & 4L lithographed can


SHELF LIFE:

5 years in unopened container

STORAGE & DISPOSAL:

Keep container tightly sealed. Do not store above 35 °C. Must not be disposed together with household garbage. Do not allow product to reach sewage system. Disposal must be according to government regulations.

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

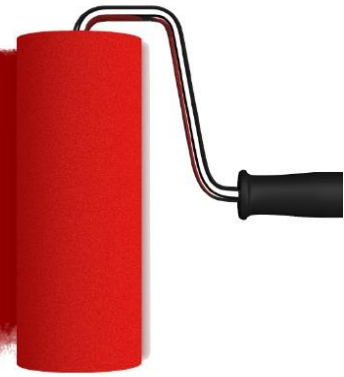

LABEL ELEMENTS:



Danger: Highly flammable liquid and vapour. May damage fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure. May be fatal if swallowed and enters airways. Toxic to aquatic life with long-lasting effects. Causes skin and serious eye irritation. May cause an allergic skin reaction. May cause respiratory irritation.

Contains: Methyl Methacrylate, Methylbenzene, Dimethylbenzene, Cellulose Acetate

Precautions: Avoid exposure – obtain special instructions before use. Keep locked up and out of the reach of children. Do not empty into drains, dispose of this material and its container at hazardous or special waste collection point. Wear suitable protective clothing, gloves, and eye/face protection. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

