

ISLAND EN GLOSS 800GE WHITE

DESCRIPTION:

ISLAND EN GLOSS 800GE WHITE is a premium quality, high-coverage alkyd-based enamel designed to provide a bright white finish w/ good weathering property.

USE:

Used as a general-purpose finishing coat on wood and metal surfaces, normally used as white when extra brightness is desired.

COLOR:

White, maybe tinted to pastel shades by using Island Oil Tinting Colors.


FINISH:

Gloss

APPLICATION:



Brush



Roller



Spray

REDUCTION:

Island 006 Paint Thinner

Brush & Roller : applied as is or may add about 5% reducer

Spray : add about 10% reducer

DRYING TIME:

Dry hard : 6-8 hours

COVERAGE:

Approximately 28-30 sq. m. / 4L gallon.

SURFACE PREPARATION:

Surface to be painted should be clean and dry, free from dust, dirt, and other foreign matters.

For New Wood Substrate:

1. Sand rough surface and then dust off.
2. Apply first to sanded surface, Island Wood Primer & Sealer 801 White.
3. Apply one (1) or two (2) coats of Island Gloss Enamel either by roller, brush, or spray.
4. Allow 24 hours before recoating.


For Previously Painted Wood Surface:

1. Sand rough surface and then dust off.
2. Apply Island Wood Primer & Sealer 801 White to damaged or unprimed areas.
3. Apply one (1) or two (2) coats of Island Gloss Enamel either by roller, brush or spray.
4. Allow 24 hours before recoating.

For Metal Substrate:

1. Metal surfaces must be clean, dry and free from dust, rust, grease and other contaminants.
2. Apply Island Gloss Enamel to the surface properly primed with either by roller, brush or spray.
3. Allow 24 hours if second coat is necessary.

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

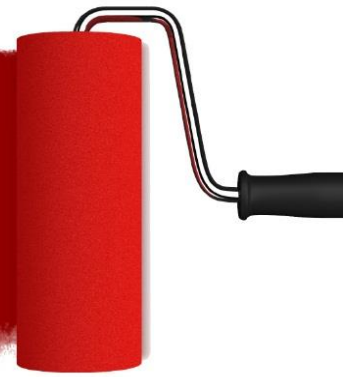**PACKAGING:**

4L lithographed can

SHELF LIFE:

2 years in unopened container

STORAGE & DISPOSAL:

Keep container tightly sealed. Do not store above 35 °C. Must not be disposed together with household garbage. Do not allow product to reach sewage system. Disposal must be according to government regulations.

LABEL ELEMENTS:

Danger. Flammable liquid and vapour. May cause genetic defects. May cause cancer. May be fatal if swallowed and enters airways. Causes skin irritation. May cause respiratory irritation. May cause drowsiness or dizziness. May be harmful if inhaled. Harmful to aquatic life with long-lasting effects.

Contains: Kerosene, Naphtha (petroleum), hydrodesulfurized heavy

Precaution: Avoid exposure – obtain special instructions before use. Keep locked up and out of the reach of children. Do not empty into drains, dispose of this material and its container at hazardous or special waste collection point. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

Head Office Address:

No. 2, 3rd Avenue,
S.Osmeña Blvd., North
Reclamation Area, Cebu City,
6000, Philippines
www.islandpaints.com

Email:

info@treasureisland.com.ph

Tel # Head Office :

232-0513 to 17

Fax:

(63-32) 232-0518

Information Office:

83-35 Plaridel St.,
Cebu City, 6000,
Philippines

Tel # for Info Office :

254-2226

412-4113

412-4082

Fax:

(63-32) 255-2656