



PRIMA FLAT LATEX

DESCRIPTION:

PRIMA FLAT is a high-quality acrylic paint formulated to provide a durable flat finish with enhanced adhesion and excellent hiding properties. This product is designed to function both as primer and interior flat finish.

USE:

Used as finish coat for concrete, masonry, bricks, hollow blocks, hardiflex and cement boards. In some cases, it may be applied over properly primed wood or metal.

COLOR:

White and variety of 30 readily available shades (refer to chart). Our series # 1, 2, and 3 offers additional 720 shades which can be availed thru our dispensing machine outlets.


FINISH:

Flat

APPLICATION:



Brush



Roller



Spray

REDUCTION:

Use as is or may add $\frac{1}{4}$ – $\frac{1}{2}$ liter clean water to a gallon of paint. For optimum performance, 1-2 coats are normally applied.

DRYING TIME:

Dry to recoat; allow 2-4 hours

COVERAGE:

Approximately 25-30 sq. m. / 4 liters

SURFACE PREPARATION:

The surface must be dust-off, clean, free of dirt or any adhesion barrier and thoroughly dry.

PACKAGING:

1L, 4L, and 16L plastic containers


SHELF LIFE:

3 years in unopened container

STORAGE & DISPOSAL:

Keep container tightly sealed. Do not store above 35 °C. Must not be disposed together with household garbage. Do not allow product to reach sewage system. Disposal must be according to government regulations.

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

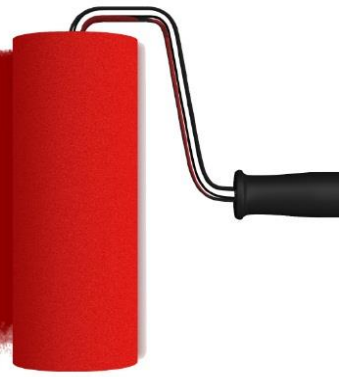

LABEL ELEMENTS:



Warning. Harmful if swallowed. May cause an allergic skin reaction. May be harmful if inhaled. Harmful to aquatic life with long lasting effects.

Contains: Reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-2H-isothiazol-3-one [EC no. 220-239-6] (3:1)

Precaution: Keep out of the reach of children. Avoid contact with skin and eyes. Do not empty into drains, dispose of these materials and its container at hazardous or special waste collection point. Wear suitable gloves. If swallowed, seek medical advice immediately and show this container or label.

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

Rev. 2



Treasure Island
INDUSTRIAL CORPORATION

ISO 9001 CERTIFIED

Head Office Address:
No. 2, 3rd Avenue,
S. Osmeña Blvd., North
Reclamation Area, Cebu City,
6000, Philippines
www.islandpaints.com

Email:
info@treasureisland.com.ph
Tel # Head Office :
232-0513 to 17
Fax:
(63-32) 232-0518

Information Office:
83-35 Plaridel St.,
Cebu City, 6000,
Philippines

Tel # for Info Office :
254-2226
412-4113
412-4082
Fax:
(63-32) 255-2656