

PRIMA PRIMER 301 WHITE

DESCRIPTION:

PRIMA PRIMER 301 WHITE is a pure acrylic-based paint especially formulated for exterior and interior application. It offers good retention, good alkali resistance and excellent durability.

USE:

Suited as primer and sealer coat to exterior and interior masonry, concrete, bricks, cement boards and any type of concrete blocks.

COLOR:

White


FINISH:

Flat

APPLICATION:



Brush



Roller



Spray

NOTE: One coat is normally applied as primer and sealer coat. To patch up hair-line cracks or spot surface imperfections, use Prima 300CP Concrete Putty.

REDUCTION:

Brush & Roller : Apply as is or may add up to ½ liter clean water to a gallon of paint.

Spray : About 10-15% reduction

DRYING TIME:

Dry to recoat : 2-4 hours

COVERAGE:

Approximately 25-30 sq. m. / 4 liters

SURFACE PREPARATION:

The surface must be dust-off, clean, free of dirt or any adhesion barrier and thoroughly dry.

SUGGESTED FINISH COAT:

Prima Flat, Satin, Semi-Gloss or Gloss and any other Prima-based finish coat.

PACKAGING:

1L, 4L, and 16L plastic containers


SHELF LIFE:

3 years in unopened container

STORAGE & DISPOSAL:

Keep container tightly sealed. Do not store above 35 °C. Must not be disposed together with household garbage. Do not allow product to reach sewage system. Disposal must be according to government regulations.

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

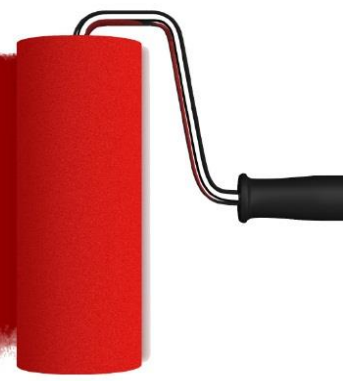

LABEL ELEMENTS:



Warning. Harmful if swallowed. May cause an allergic skin reaction. Harmful to aquatic life with long lasting effects.

Contains: 2-hydroxyethyl cellulose.

Precaution: Handle and open container with care. Avoid contact with skin and eyes. Do not empty into drains, dispose of these materials and its container at hazardous or special waste collection point.

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

