



## PRIMA SATIN

### DESCRIPTION:

**PRIMA SATIN** is a high-quality acrylic water-based paint especially formulated for interior & exterior applications offering high opacity, good alkali, and scrub resistance while providing an excellent and durable finish.

### USE:

Finish coat for exterior and interior masonry surfaces such as concrete, bricks, hollow blocks, cement plaster and in some case, may be even applied to properly primed wood or metal.

### COLOR:

Our series # 1, 2, and 3 offers additional 720 shades which can be availed thru our dispensing machine outlets.


### FINISH:

Satin

### APPLICATION TOOLS:



Brush



Roller



Spray

### REDUCTION:

#### FOR BRUSH & ROLLER APPLICATION

Apply as is or if necessary, add ¼ liter of clean water to a gallon of paint.

#### FOR SPRAY APPLICATION

Add approximately ¼ to ½ liter of clean water to a gallon of paint.

Apply two coats for optimum performance.

### RECOMMENDED PRIMER:

Prima 301 Latex Primer

### DRYING TIME:

Dry to recoat : 2-4 hours

### SURFACE PREPARATION:

The primed surface should be dry, dusted-off, clean, free of dirt or any adhesion barrier.

### COVERAGE:

Approximately 25-30 sq.m./ 4 liters

### PACKAGING:

4 L plastic container


### SHELF LIFE:

3 years in unopened container

### STORAGE & DISPOSAL:

Keep container tightly sealed. Do not store above 35 °C. Must not be disposed together with household garbage. Do not allow product to reach sewage system. Disposal must be according to government regulations.

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

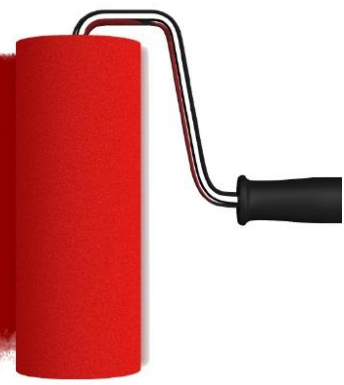

## LABEL ELEMENTS:



**Warning.** Harmful if swallowed. May cause an allergic skin reaction. May be harmful if inhaled. Harmful to aquatic life with long lasting effects.

**Contains:** Reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-2H-isothiazol-3-one [EC no. 220-239-6] (3:1), 2-Hydroxyethyl cellulose

**Precaution.** Avoid exposure – obtain special instructions before use. Keep locked up and out of reach of children. Avoid contact with skin. Do not empty into drains, dispose of this material and its container at hazardous or special waste collection point. Wear suitable gloves and eye/face protection. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

