

PRIMA SEMI-GLOSS LATEX 300SG WHITE

DESCRIPTION:

PRIMA SEMI-GLOSS LATEX 300SG WHITE is a high-quality acrylic-based paint with high opacity, good alkali and scrub resistance while providing for an excellent and durable finish.

USE:

Finish coat for exterior and interior masonry surfaces such as concrete, hollow blocks, and cement plaster. It is also recommended for surfaces where dirt pick-up is a problem and where heavy mildew and fungus growth are prevalent.


FINISH:

Semi-Gloss

COLOR:

30 colors (Pre-mixed, refer to Color Chart)
240 colors (Special-Mixed, refer to Series1 Color Swatch)
240 colors (Special-Mixed, refer to Series2 Color Swatch)

APPLICATION:

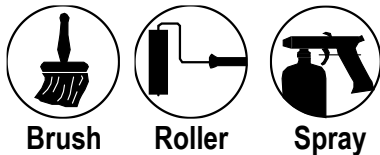

RECOMMENDED PRIMER:

Prima Primer 301 White

REDUCTION:

Use as supplied or reduce with not more than 1/4 - 1/2 liter of clean water per 4 liters paint.

DRYING TIME:

Dry to Handle : 30 minutes
Dry Hard : 2 hours
Dry to Recoat : 4 hours minimum

SURFACE PREPARATION:

The primed surface should be clean, free of dirt, or any adhesion barrier and dry.

COVERAGE:

Approximately 25 – 30 sq. meters / 4 liters

PACKAGING:

1L, 4L, and 16L plastic container

SHELF LIFE:

3 years in unopened container

STORAGE & DISPOSAL:

Keep container tightly sealed. Do not store above 35 °C. Must not be disposed together with household garbage. Do not allow product to reach sewage system. Disposal must be according to government regulations.

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.



LABEL ELEMENTS:



Warning: Harmful if swallowed. May cause an allergic skin reaction. May be harmful if inhaled. Causes mild skin irritation. Harmful to aquatic life with long-lasting effects.

Contains: reaction mass of :5-chloro-2 methyl-4 isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-2 H-isothiazol-3-one [EC no. 220-239-6] (3:1), 2-hydroxyethyl cellulose

Precaution: Avoid exposure – obtain special instructions before use. Keep locked up and out of the reach of children. Avoid contact with skin. Do not empty into drains, dispose of this material and its container to hazardous or special waste collection point. Wear suitable gloves. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

