



## TEX-A-KOTE GLOSS 2800GL WHITE

### DESCRIPTION:

**TEX-A-KOTE GLOSS 2800GL WHITE** is a solvent-thinned Acrylic Resin based finish for today's generation of decorative and protective coating.

### USE:

Suited for concrete or masonry, wood, plywood, particle board and interior.

### FEATURES:

- Excellent outdoor durability
- Color fast, non-yellowing
- Alkali resistant
- Water-proof property
- Superior Adhesion
- Easy to clean

### COLOR:

Available in 2800 White, may be tinted to pastel shades with Island Tex-a-kote Tinting Color.


### FINISH:

Glossy

Patterns *(When applied over Tex-a-kote 2800C Cast)*

Tile Finish      Medium Texture  
Fine Texture      Large Texture

### APPLICATION TOOLS:

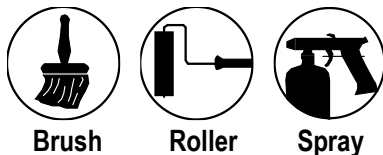

Brush

Roller

Spray

### REDUCTION:

Tex-a-kote 2802 Reducer  
Reduction with Tex-a-kote Reducer 2802 is approximately 5% and 10% respectively. Brush is used on hard-to-reach areas or corner.

### DRYING TIME:

**Dry to touch:** 5 minutes

**Dry to recoat:** 12 – 24 hours

### SURFACE PREPARATION:

Remove loosely adherent mortar, dirt, dust, or any adhesion barrier. Tex-a-kote is alkali-resistant, however, for best result, neutralize highly alkaline new concrete. Dry surface thoroughly prior to painting.

### RECOMMENDED PRIMER:

Tex-a-kote Primer 2800 White

### COVERAGE:

Approximately 20-25 sq.m. / gallon, depending on surface porosity

### PACKAGING:

4L lithographed round can

### SHELF LIFE:

5 years in unopened container

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.





## STORAGE & DISPOSAL:

Keep container tightly sealed. Do not store above 35°C. Must not be disposed together with household garbage. Do not allow product to reach sewage system. Disposal must be according to government regulations.

## LABEL ELEMENTS:



**Danger.** Flammable liquid and vapour. May cause genetic defects. May cause cancer. May damage fertility or the unborn child. May be fatal if swallowed and enters airways. Harmful if inhaled. Causes mild skin irritation. Harmful to aquatic life with long-lasting effects.

**Contains:** Solvent naphtha (Petroleum), light arom., Di-(2-ethylhexyl)phthalate

**Precaution:** Avoid exposure - obtain special instructions before use. Keep locked up and out of the reach of children. Do not empty into drains, dispose of this material and its container at hazardous or special waste collection point. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

The information in this data sheet is based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from the responsibility of carrying out their own tests neither do they imply any legally binding assurance of certain properties or suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any propriety rights and existing laws and legislation are observed.

